


# GRANDE

Apparecchi da incasso a suolo a LED molto potenti e di forma generosa, proprio come il loro nome. Sono stati studiati per l'illuminazione di superfici di ampie facciate ed imponenti alberi. Oltre agli effetti di illuminazione diretta, GRANDE riesce, con la sua potenza, a generare anche illuminazione indiretta e scenografici riflessi. L'anello di chiusura in fusione di alluminio crea una cornice che racchiude visivamente la fonte luminosa, che risulta radente alla superficie d'installazione.

Ground recessed fixtures with LED source, very powerful and with big shape, just like the name indicates. This has been studied for the lighting of surfaces of large facades and imposing trees. GRANDE can, by his power, generate effect of direct lighting and scenographic indirect reflexes. The closing ring in cast aluminum creates a frame which encloses visually the light source, which is grazing the surface of installation.



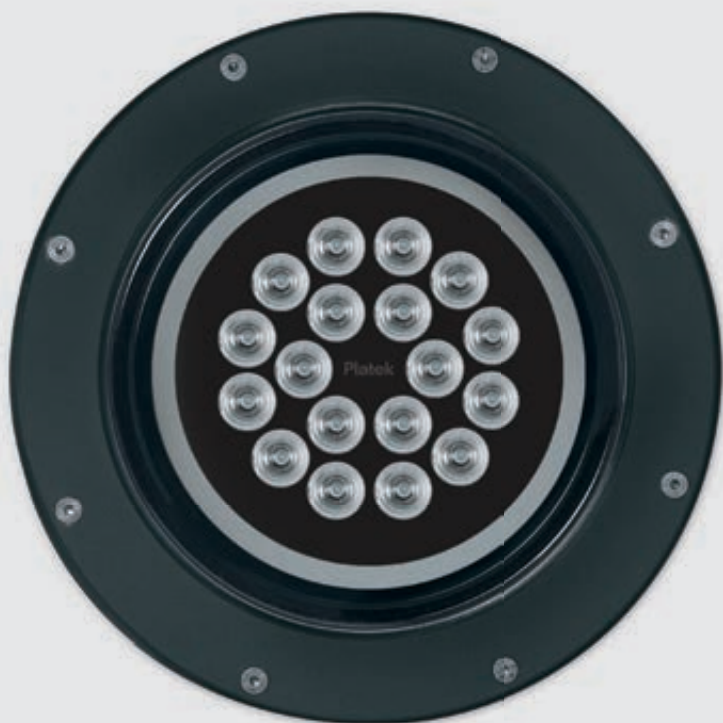

## INFORMAZIONI TECNICHE

Corpo e flangia di chiusura in lega di alluminio pressofuso verniciato e resistente alla corrosione. Protezione con trattamento di anodizzazione, fondo con polveri epossidiche e verniciatura poliestere. Viti in acciaio inox A4. Grado di protezione IP68 con sistema Full Dry che evita la formazione di condensa all'interno del prodotto. Controcassa in

alluminio e ferro zincato da ordinare separatamente. Installazione in controcassa gettata nel cemento con un letto di drenaggio di ghiaia di 20-30 cm. Solamente una connessione IP68 alla rete di alimentazione può garantire la stessa protezione all'apparecchio.

## TECHNICAL INFORMATION

Die-cast aluminium body and flange. Protection with anodizing treatment, epoxy powder base coating and polyester painting. A4 stainless steel screws. IP68 protection rating with Full Dry system preventing condensation inside the fitting. Zinc-plated iron and aluminium sleeve to be ordered separately. Installation in sleeve set in

concrete, with a 20-30 cm gravel drain bed. Only an IP68 rated connection to power supply cable can guarantee the IP68 protection rating to the luminaire.






WHITE LED 230V




**84 08 511**  
**LED 3000K CRI>80**  
 40,5W / 3960 lm LED data  
**44W / 3705 lm Real data**  
 220-240V 50/60Hz  
**Thermal LED protection**  
 A / A+ / A++  
 Cable length 3 m (3 x 1,5 mm<sup>2</sup>)




20	1,7	1,3	0,5	E(x)
16	3,6	2,2	0,6	3000K
12	9,3	3,7	0,9	@700 mA
8	33	6,2	0,8	
4	148	5,9	0,6	
	0,1 (m)	1,5	3	

**84 08 513**  
**LED 3000K CRI>80**  
 40,5W / 3960 lm LED data  
**44W / 3340 lm Real data**  
 220-240V 50/60Hz  
**Thermal LED protection**  
 A / A+ / A++  
 Cable length 3 m (3 x 1,5 mm<sup>2</sup>)

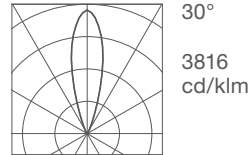


20	0,9	0,9	0,8	E(x)
16	1,9	1,8	1,4	3000K
12	5	4,5	3	@700 mA
8	21	17	4,3	
4	274	25	1,5	
	0,3 (m)	1,5	3	

RGBW 24 LED max. 700mA



**83 08 508**  
**24 LED RGBW**  
 max. 48,7W Nominal power  
 max. 700mA \*  
 4 channels + 1 channel NTC  
 A / A+ / A++  
 Cable length 3,5 m (10 x 0,32 mm<sup>2</sup>)

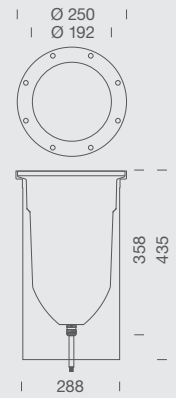

PRODUCT INFORMATION

FULL ALUMINIUM

IP68 Full Dry  
 IK 10  
 12 mm flat tempered  
 extra clear glass  
 4500 Kg

Recessed box excluded and  
 IP68 connector excluded to  
 be ordered separately

\* Power supply excluded to  
 be ordered separately

AVAILABLE COLOURS  
 ■ .01 black

TECHNICAL DATA

Disponibile su richiesta senza maggiorazione di prezzo (per la composizione del codice consultare pagina 8)  
 Available upon request without surcharge (for the code composition, please refer to page 9)

HELP YOU

LED LED COLOURS TEMPERATURE 4000K

Other LED colors available on request

OPTICS WIDE ELLIPTICAL

INFO Ulteriori versioni sono disponibili consultando [www.platek.eu](http://www.platek.eu)

More versions are available on [www.platek.eu](http://www.platek.eu)

ACCESSORI (per maggiori dettagli consultare pagina 321)  
 ACCESSORIES (for further details please refer to page 321)

**IP20**  
 RECESSED BOX  
 page 333  
 89 45 010 - Ø 250 H. 435

**IP CONNECTOR FOR IN LINE WIRING**  
 page 336  
 89 17 014 - 3 x 1,5 mm<sup>2</sup>

**IP CONNECTOR FOR THROUGH WIRING**  
 page 336  
 89 17 004 - 3 x 4 mm<sup>2</sup>

**RING**  
 89 39 000 AISI 316L RING

**RGB +W**  
 DRIVER RGB/RGBW  
 page 322  
 89 56 135 - 24 LED  
 89 56 110 - 48 LED  
 89 56 115 - 384 LED



More details at: [platek.eu/GRANDE](http://platek.eu/GRANDE)